

---

# Operating the Hikvision kit, Wi-Fi connection, mobile app activation

---

## Call forwarding

The intercom system can be remotely controlled via the Hik-Connect mobile app. The app allows you to answer calls, open the door remotely, monitor the video feed and browse photos from the door station. Information about events occurring in the intercom system is sent to a phone/tablet as a PUSH notification.

- Download the Hik-Connect Mobile App from the Hikvision App Store, install it on your smartphone. The mobile app is available for Android (ver. 4.0 or newer) and iOS (ver. 7 or newer) smartphones.
- Run the mobile app. If you don't have a Hik-Connect account, create it according to the instructions provided in the app.
- The indoor station can be added by scanning the QR code via the app. Make sure the indoor station is turned on and active (screen visible). Make sure the Hik-Connect service is turned on (it is turned off by default).

## Set up Wi-Fi connection on the indoor station

Turn on Wi-Fi:

- Select *Settings* on the indoor station main screen,
- Select „Wi-Fi settings” on the side panel
- Turn on scanning for Wi-Fi networks - tap the toggle switch button into ON position
- Connect to your local (home) network



## Add device to mobile app


- In the *Advanced settings* go to *Configuration* (enter administrator password),
- Go to *Hik-Connect Service Settings*, tap the toggle switch button into ON position to enable the Hik-Connect service

---

## *Operating the Hikvision kit, Wi-Fi connection, mobile app activation*

---

- On the Hik-Connect app home page tap the Add button (+), choose the „Scan QR code” option and scan the QR code displayed on the right side of the indoor station screen. Confirm the scanned code by tapping the Add button.

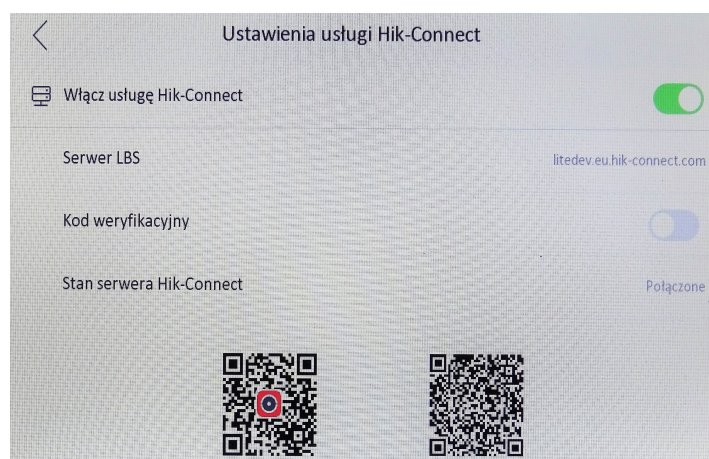

### **Indoor Station main menu screen**

- *Call*  
Call log, with date and time of the event. Contact list and a keypad that allows you to manually call other residents in multi-tenant installations or other indoor stations in single-family installations.
- *Message*  
Voice messages recorded by visitors, with date and time of the recording. Screenshots of the camera view, taken when the pushbutton was pressed.
- *Live view*  
Live video feed from every door station added in the system. You can begin a call, open the door and capture images of the door station camera view. Live video feed from every network CCTV camera, with image capture.
- *Settings*  
Multi-level settings panel for system administration and device parameters. Network settings, device configuration settings, Wi-Fi settings, doorbell tone settings, etc.